

AKA Control Tyre for Leopard 125cc and Restricted TaG

The FZ YELLOW tyre is very versatile, which is why the FZ compound ensures the drivers great performance on a wider range of track and weather conditions.

The FZ YELLOW tyre is widely used in many countries. These are tyres are for high and medium level competition, with a perfect balance between consistency, durability and performance. MG has invested in technology to enhance the acclaimed FZ line.

MG FZ - SPECIFICATIONS/

Model	FZ	FZ (3)	FZ	FZ
Homologation 2008/2016	CIK	-	CIK	CIK
Size	10 x 4.60 - 5	11 x 6.00 - 5	11 x 6.50 - 5	11 x 6.50 - 5
Hardness Shore A +- 5 (DIN 53505)		50		50
L (mm) +- 10	131	180		180
B (mm) +- 10	105	132		140
C (mm) +- 5	120	170		170
d (mm) +- 0 - 1	126.20	126.20		126.20

MG-FZ (Yellow) Tyres

D (mm) +/- 10.00	258	274	275
------------------	-----	-----	-----


BAR +/- 0.200.80	0.80	0.80	0.80
Recommended Air Pressure	PSI +/- 3.00	11.60	11.60

Maximum Air Pressure	BAR	4.00	4.00
----------------------	-----	------	------

PSI	58.00	58.00	58.00
-----	-------	-------	-------

Maximum Speed	Km/h	200	200
---------------	------	-----	-----

Mph	125	125	125
-----	-----	-----	-----

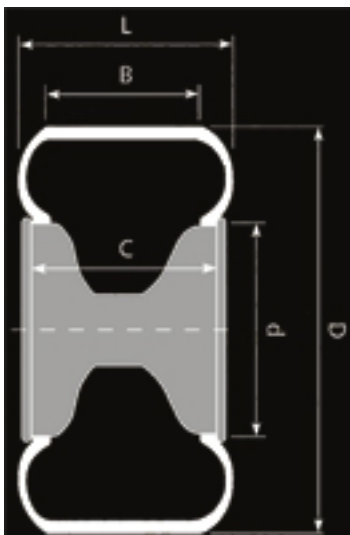

(1) The hardness tests are made with 23°C +/-2 Temperature and humidity 55% +/-5

(2) With hot tyre

(3) Manufactured under request